



Riehle


think process!



Lye application machine **Allround**

Artisan High Speed!
The fastest lye application machine in its class!

WP BAKERYGROUP

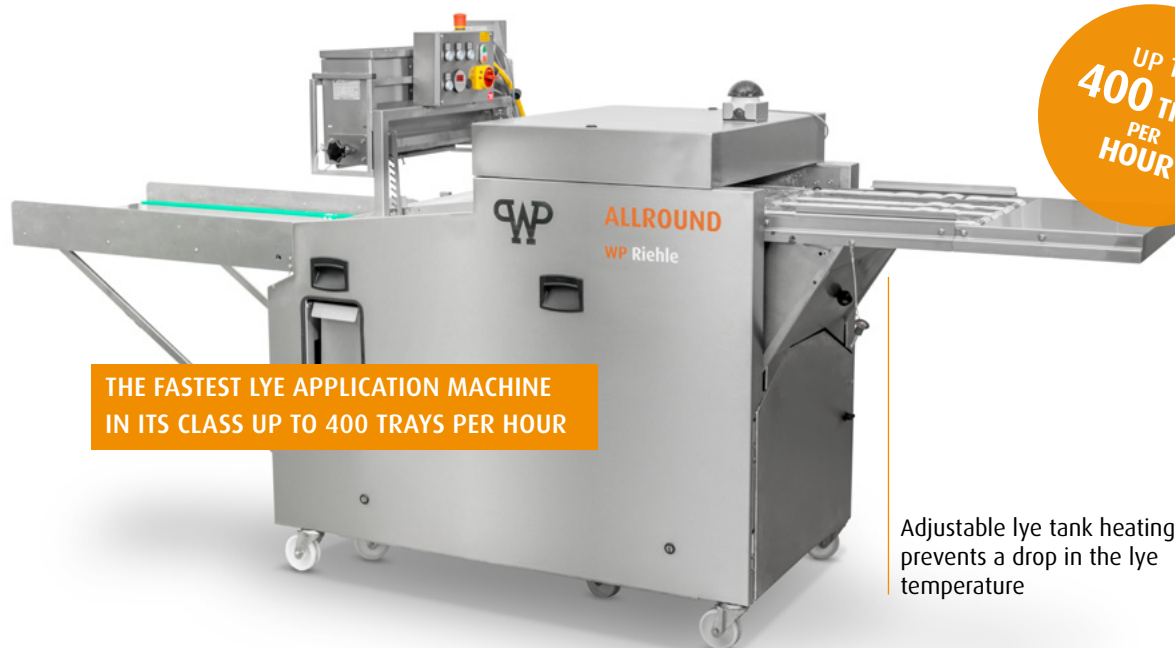

UP TO
400 TRAYS
PER
HOUR

**THE FASTEST LYE APPLICATION MACHINE
IN ITS CLASS UP TO 400 TRAYS PER HOUR**

Adjustable lye tank heating
prevents a drop in the lye
temperature

BENEFIT

- even showering results also on high speed because of 2 lye waterfall curtains plus patented WP Riehle lye shower
- the adjustable tank heating avoids the drop down of the lye temperature and guarantees constant shine and colour throughout the entire production time
- computer control for adjustable speed
- long shower belt enables showering of large products
- New** ■ **all process-relevant parts are made of blue plastic**
- New** ■ rollable 180 litre lye tank, **easily accessible via side flap**
 - tank lye level sensor prevents pump from running dry
- New** ■ **gas springs on the discharge table for easier folding**



TECHNICAL DETAILS

Tray size	580 x 980 mm	580 x 780 mm
Length operational	3,475 mm	3,275 mm
Length rest position	1,625 mm	1,625 mm
Width	880 mm	880 mm
exit table height	950 mm	950 mm
Capacity	up to 350 trays/h	up to 400 trays/h
Weight	approx. 360 kg	approx. 360 kg
Voltage	3 x 230 V/400 V/N/PE/50 Hz	3 x 230 V/400 V/N/PE/50 Hz
max. connected load	6.5 kW	6.5 kW
Lye tank capacity	approx. 180 litre	approx. 180 litre

OPTIONS

- New** ■ speedy control enables new feeding while the previous feed is still on the way
- **flat tray deposit belt prevents prezeles from distortion when deposited** and keeps baking trays clear from excess toppings
- automatic scattering unit with brush roller, speed adjustable for different scattering toppings
- exchange toppings container for scattering unit

WP LEBENSMITTELTECHNIK RIEHLE GMBH

Heinrich-Rieger-Str. 5 // D-73430 Aalen, Germany // Tel. +49 7361 5580-0 // Fax +49 7361 5580-2281
info@riehle.de // www.wp-riehle.de