

N COL

DEEP FRYING (PASTRY)

L2000A L2000A Tank & Pump L2000A Vario

Deep fryer Linie 2000 A

The automatic deep fryer for excellent results

think process!

WP BAKERYGROUP

Riehle

L2000A

BENEFITS

- tightly closing WP RIEHLE volume cover for bigger volume on the same given weight
- longer oil life thanks to pulsed heating during heating up of the fryer
- minimum energy consumption and constant temperature due to direct heating in the oil
- Iowest fat absorption due to constant temperature
- computer control with 10 baking programs for consistent quality
- automatic mode enables free working time during the baking process

OPTIONS

- optional fermentation chamber with integrated 0.53 gal water tank
- optional oil drain tank with filter and backwash pump
- available as a Vario Station with 2 fryers and a table in the middle
- turning basket and dumping trays (each 4-and 6-row)
- high trolleys (16, 18 and 20 shelves)
- various accessories available

TECHNICAL DETAILS

-	<i>a</i> : <i>a</i> .	a: 10	a: (a		
Туре	Size 36	Size 48	Size 60		
Length	63.0"	79.0"	94.5″		
Width	39.0"				
Weight (empty)	approx. 275.5 lbs	approx. 297.6 lbs	approx. 319.6 lbs		
Weight (empty) with fermentation chamber	approx. 343.9 lbs	approx. 392.4 lbs	approx. 491.6 lbs		
Voltage 3 ph/60Hz Voltage 1 ph/60Hz	208-240V				
max. connected load:					
heater	6-8 kW	7.5 - 10 kW	9 - 12 kW		
fermentation chamber	0.8 - 14 kW	0.8 - 14 kW	0.8 - 14 kW		
Capacity	9 gal	11 gal	15 gal		





Optionally with integrated fermentation chamber

Fully automatic baking thanks to programmable baking processes and automatic turning.



DEEP FRYING L2000A TANK & PUMP





BENEFITS


- drain tank with filter and backwash pump for longer oil life
- used oil is collected in the tank after filtering at the end of work
- the backwash pump provides oil pumping back into the oil tub after filtering
- if the oil is no longer required, it can be drained from the tank

OPTIONS

- a separately standing mobile fermentation chamber with integrated 0.53 gal water tank can be provided instead of the integrated fermentation chamber
- other options are the same as for the L2000A

TECHNICAL DETAILS WITH MOBILE FERMENTATION CHAMBER

Туре	Size 36	Size 48	Size 60
Length with mobile fermentation chamber	72.8″	88.6″	104.3"

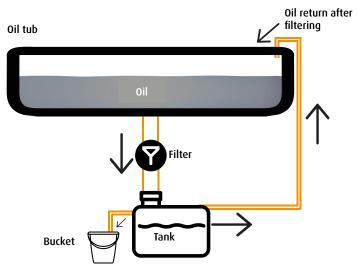



Space for accessories underneath the discharge table

Example: Option with mobile fermentation chamber



L2000A VARIO





The extractor hoods shown are optionally available.

BENEFITS VARIO

- Doubling of the production volume
- Connection table in the middle

TECHNICAL DETAILS VARIO

Туре	Size 36	Size 48	Size 60	
Length Vario	100.8″	124.8″	148"	
Width	39"			
Weight (empty)	approx. 551.15 lbs	approx. 595.24 lbs	approx. 198.41 lbs	
Voltage 3 ph/60Hz Voltage 1 ph/60Hz	208-240V			
Max. connected load:				
Heater	2x 6-8 kW	2x 7.5 - 10 kW	2x 9 - 12 kW	
Fermentation chamber	2x 0.8 - 14 kW	2x 0.8 - 14 kW	2x 0.8 - 14 kW	
Capacity	9 gal	11 gal	15 gal	

WP Lebensmitteltechnik RIEHLE GmbH Dr.-Rudolf-Schieber-Str. 15 D-73463 Westhausen (Germany) phone +49 7363 95390-0 info@riehle.de | www.wp-riehle.de



© 2025 WP Lebensmitteltechnik RIEHLE GmbH. All information provided without guarantee. Changes and errors excepted. All rights reserved. Version 2/2025